




STANDARD FABRICS



Black (60999)
Nordic Wool

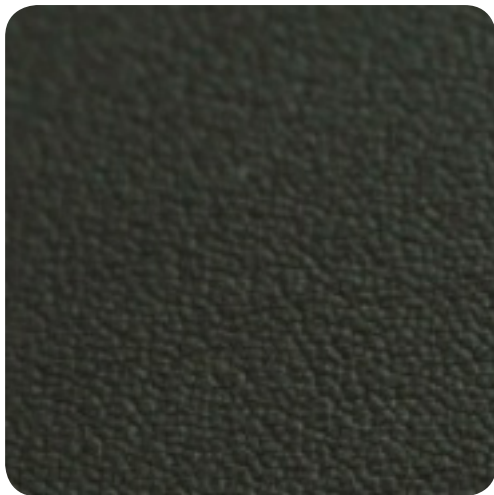

Black (F641-701)
Skai Palma



Black (9400)

Alcantara



Goya Red (3096)



Anthracite (6422)



Commodore Blue (6503)



STANDARD FABRICS
SPECIFICATIONS

Nordic Wool

Composition: 88 % Wool, 12% Polyamide
Weight: 400 g/m²
Abrasion resistance: EN ISO 12947-2/ - 120.000 rubs Martindale
Pilling resistance: EN ISO 105x12, 4 (7000 cycles)
Flammability: BS EN 1021-1:2006 (cigarette), BS EN 1021-2:2006 (match) BS5852: Part 1:1979: Source 0 BS5852: Part 1:1979: Source 1*
Colour fastness to light: EN ISO 105-B02 – 5-6
Colour fastness to rubbing: EN ISO 105x12, wet/dry, 4/5
Wool is antistatic and does not attract dirt like other fabrics. We recommend gentle vacuuming, preferably every week, with a soft nozzle. Wool is naturally resistant to dirt and fire. Most spots can be removed with lukewarm water possibly added a neutral detergent.

Skai Palma

Composition: 89% PVC-compound, 11% CO/PES knitted fabric
Weight: 825 +/- 50 gr/m²
Thickness: 1,3 +/- 0,2 mm
Martindale Abrasion: DIN EN ISO 5470-2: > 50.000
Flame retardant types: BS5852 IS-O+1, DIN4102 (Part 1, B2), DIN53438 (Part 2), EN1021-1+2 MVSS302NF M2 f
Flame retardant, long-lasting, lightfast, abrasion-resistant, tear-resistant, steam permeable, resistant to urine and blood, easy to clean, resistant to disinfectants.

Alcantara

COMPOSITION	ALCANTARA®	POLYESTER	68 ± 3 %
		POLYURETHANE	32 ± 3 %
	BACKING	COT/KANECARON®	45/55 %
WEIGHT		EN 29073-1	≥ 450 G/M2
TEAR RESISTANCE		EN ISO 13937-3	≥ 30 N
MARTINDALE ABRASION 12KPA		EN ISO 12947-4	≥ 20000 CYCLES
	END POINT	EN ISO 12947-2	≥ 150000 CYCLES
FLAME RESISTANCE		BS 5852 CRIB 5 (Sect3)	PASS
PILLING RESISTANCE	2000 CYCLES	EN ISO 12945-2	≥ 4/5
COLOR FASTNESS			
	TO LIGHT	EN ISO 105-B02	≥ 5 BLUE SCALE (1-8)
	TO DRY CLEANING	TONE CHANGE AATCC-132	≥ 4 GREY SCALE (1-5)
		STAINING AATCC-132	≥ 3 WHITE SCALE (1-5)
	TO RUBBING	DRY EN ISO 105-X12	≥ 4 WHITE SCALE (1-5)
		WET EN ISO 105-X12	≥ 3 WHITE SCALE (1-5)
	TO WATER	TONE CHANGE EN ISO 105-E01	≥ 4 GREY SCALE (1-5)
		STAINING EN ISO 105-E01	≥ 3.5 WHITE SCALE (1-5)

Result of a unique, proprietary technology, Alcantara® is a thoroughly avant-garde material with aesthetic, technical and sensory qualities that no other material can equal.



Call us: (847) 679-5148
Toll-free: (844) 859-9247
Fax: (847) 933-0018
Email the President directly
jmeltzer@appliedergonomics.com